

P/N: T130665ACC

Copyright

© 2023, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T130665ACC

Commit: 73053

Language: en-US

Modified: 2021-01-15

Formatted: 2023-08-04

Website


<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.

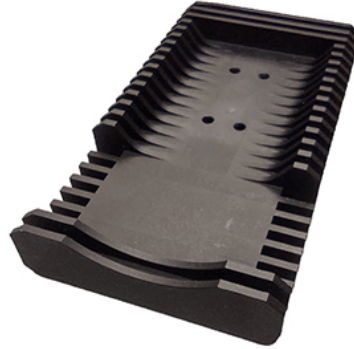

General description	
Cooling plate for FLIR A400 and FLIR A700 series.	
Physical data	
Weight	0.324 kg (0.71 lb)
Size (L x W x H)	137 x 76 x 22 mm (5.39 x 2.99 x 0.87 in)
Material	Aluminum
Color	Black
Shipping information	
Packaging, type	Cardboard box
Packaging, weight	0.364 kg (0.80 lb)
Packaging, size	166 x 61 x 68 mm (6.54 x 2.40 x 2.68 in)
EAN-13	7332558025888
UPC-12	845188021726

Compatible with the following products:

- 85900-0000; FLIR A700 Thermal Core
- 85900-1100; FLIR A700 Thermal Core, Optional temperature range
- 85902-0102; FLIR A700 24° Professional Science Kit
- 85902-0202; FLIR A700 24° Standard Science Kit
- 85903-0102; FLIR A700 24° f/1.0 Professional Science Kit
- 85903-0202; FLIR A700 24° f/1.0 Standard Science Kit
- 90600-0000; FLIR A500 Thermal Core
- 90600-1100; FLIR A500 Thermal Core, Optional temperature range
- 90610-0202; FLIR A500 24° Standard Science Kit
- 90611-0102; FLIR A500 24° Professional Science Kit
- 91900-0000; FLIR A400 Thermal Core
- 91900-1100; FLIR A400 Thermal Core, Optional temperature range
- 91902-0202; FLIR A400 24° Standard Science Kit
- 91903-0102; FLIR A400 24° Professional Science Kit
- 86401-0101; FLIR GF77a 25° LR
- 86403-0101; FLIR GF77a 6° LR